


## QUICK START GUIDE TO USING DOMINO AUTOMATIC


Please read the complete manual of the stair climber. This does not replace the manual, instead it illustrates certain phases in schematic form for quick and safe use. Operators must be trained on using the trolley according to the use and maintenance manual.

### **CLIMBING PHASE:**


- 1) Place the load on the base of the trolley (check the maximum capacity of your trolley not to exceed the permissible load limits).
- 2) Tie the load properly with the strap provided.

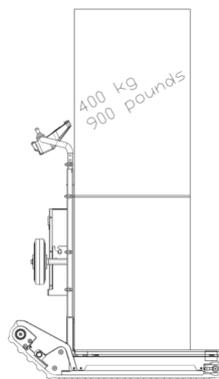

- 3) Use the wheels or crawler tracks to move the load close to the stair to climb or descend. **PLEASE NOTE:** If the load is heavy, turn on the stair climber with the button, press the "M" key and pull the knob of the joystick towards you so that the trolley tilts the load toward the operator, thus easing the operation.




- 4) Near the stair, bring the load surface to its original position (all closed) if necessary.

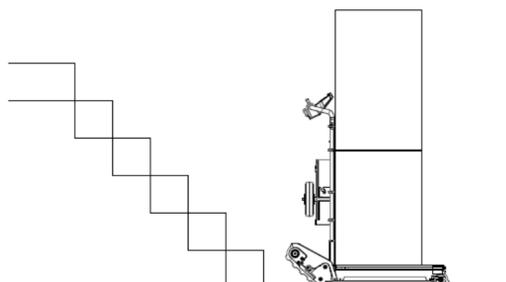

- 5) Press the "Automatic" button on the control keyboard and wait for the load to be automatically tilted towards the operator.




- 6) Start climbing the stair by modulating the speed with the joystick and waiting for the piston to automatically tilt the load as you ascend. If necessary, stop to check the stability of the load.
- 7) While moving, verify that automatic tilting set by default on the trolley is sufficient to guarantee the stability of the load, otherwise press the "M" key and manually adjust the load surface tilting with the joystick.  
PLEASE NOTE: a tilting different from the default one may be necessary for particularly bulky loads or for stairs with non-standard inclination.

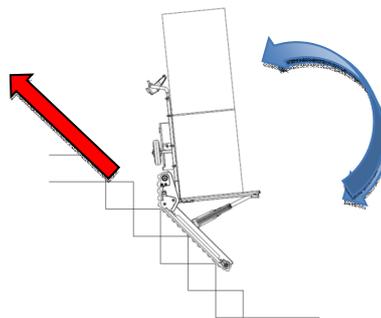


**Overturning load danger.**

It is crucial for the tracks to always rest firmly on the steps below and therefore be in contact with the staircase. It is strictly forbidden to try and pull the load towards you because when the automatic mode is engaged, this involves **AUTOMATIC CLOSURE** of the actuator and thus load instability.

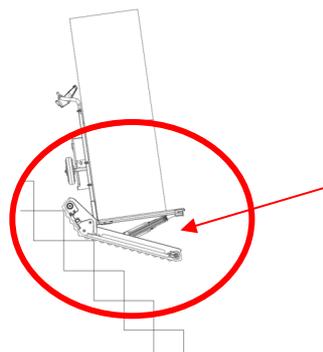

**MISTAKE:** Tracks not in contact with the staircase.


- 8) Continue climbing by adjusting the speed with the joystick so that it is suitable to the volume, weight and fragility of the load carried.
- 9) Once the stair has ended, when you reach the last step, **identify the balance point of the load, stop and lightly pull the trolley towards you through the handle.** Then, wait for the automatic closing of the crawler tracks. **Always keep a firm hold of the control handle when moving the load surface, to ensure that the trolley remains stable.** When the rear part of the tracks is resting on the landing and while the actuator is completing the closure, move the trolley with the joystick to a more secure position on the landing. **Pay particular attention to the equilibrium position of the load during this stage to prevent the load from being supported by the operator and to make sure that the automatic closing mode can be activated and completed properly.**

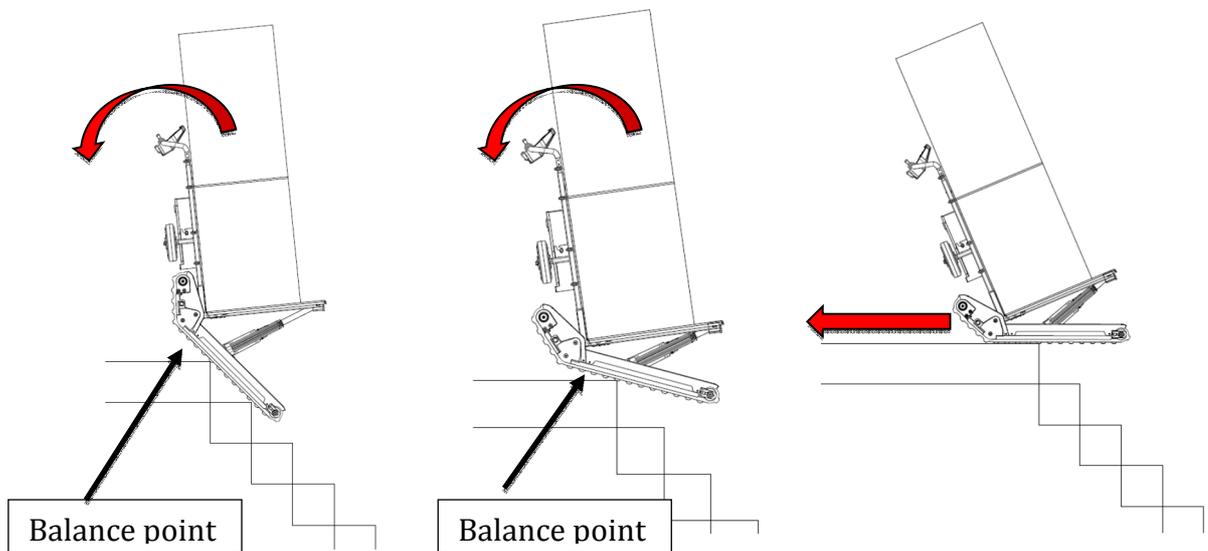


- 10) Through the joystick, rotate the load on the landing and start a new flight of stairs.

**DESCENT PHASE:**

- 11) When you are on the landing and you must descend the flight of stairs, **slowly approach with the crawler tracks and detect the balance position of the load.** **IMPORTANT: Never lean beyond the balance point, danger of overturning the load!**

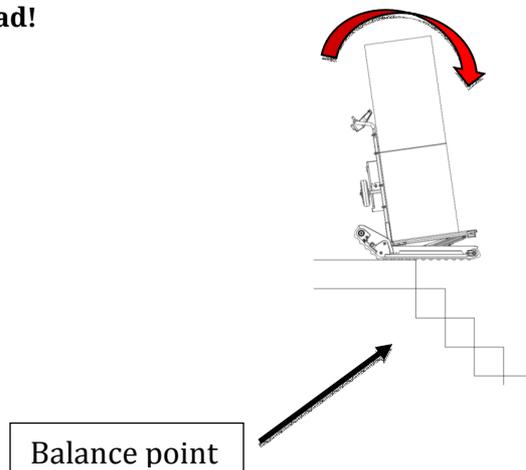

- 12) Using the handle, **lightly** push the trolley over the balance point in order to obtain the automatic opening of the crawler tracks.
- 13) Wait for the crawler tracks to open until they rest on the steps below.  
**IMPORTANT: Make sure that the crawler tracks rest fully on the steps below before beginning the descent. DANGER OF OVERTURNING THE LOAD.**

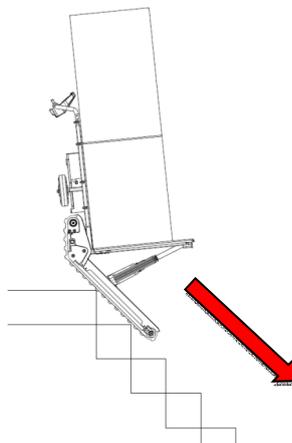

- 14) Start descending by modulating the speed with the joystick according to volume, weight and fragility of the load carried.
- 15) Once reached the landing below, slow down and wait for the automatic closing of the load surface until the crawler tracks are level.
- 16) Always disable the automatic function when using the trolley on wheels for moving on a level surface.

Before using, read the manual of use and watch carefully the proper operation video online:

[www.zonzini.it](http://www.zonzini.it)  
[www.zonzini.us](http://www.zonzini.us)  
[www.zonzini.es](http://www.zonzini.es)  
[www.zonzini.fr](http://www.zonzini.fr)  
[www.zonzini.de](http://www.zonzini.de)

We are at your disposal for any question and/or clarification.

ZONZINI SRL